

Lead Brass

bedra 37710

Material Designation*

UNS	C37710
EN	CuZn39Pb1 (CW 611 N)
JIS	C3771
GB	HPb59-1

Chemical Composition

Cu	59.0-60.0	%
Pb	0.8-1.6	%
Fe	≤0.3	%
Al	≤0.05	%
Ni	≤0.3	%
Sn	≤0.3	%
Others	≤0.2	%
Zn	Balance	%

Characteristics


The alloy has excellent hot working properties, suitable for hot forging, polishing, electroplating and other processing methods.

Physical Properties

Density ^①	8.4	g/cm ³
Electrical conductivity ^①	27	%IACS
Thermal conductivity ^①	119	W/(m·K)
Coefficient of thermal expansion ^②	20.9	10 ⁻⁶ /K
Modulus of elasticity	103.4	GPa

Note^①: Temperature for testing is 20°C.

Note^②: Temperature range for testing is 20-300°C.

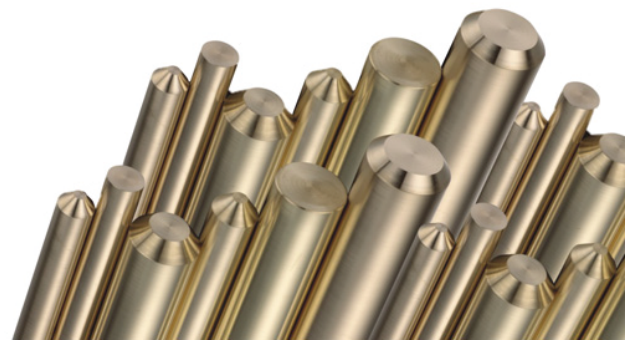

Typical Applications

It is used in air conditioning refrigeration, sanitary ware, valves and other industries.

Fabrication Properties

Cold workability	Fair
Hot workability	Good
Brazing	Good
Resistance welding	Not recommended
Hot forging compared with C37700	90%
Machinability compared with C36000	70%

Lead Brass

bedra 37710

Mechanical Properties

Diameter	Temper	Tensile Strength		Yield Strength			Elongation	
		mm	MPa min.	MPa min.	A ₁₀₀ % min.	A _{11.3} % min.	A % min.	
6 ≤ Φ < 80	R360		360	300(max.)	--	15	20	
2 ≤ Φ < 40	R410		410	230	8	10	12	
2 ≤ Φ ≤ 14	R500		500	350	3	5	8	

Tolerance and Delivery Form

Straight Bar

Diameter	Tolerance ^③	Ovality	Length		Straightness
			mm max.	ft max.	
2 ≤ Φ < 3	0.03	0.0075	2500	8.2	1.0
3 ≤ Φ < 6	0.04	0.01	2500	8.2	0.5
6 ≤ Φ < 10	0.06	0.015	4000	13.1	0.5
10 ≤ Φ < 18	0.08	0.02	4000	13.1	0.5
18 ≤ Φ < 25	0.12	0.03	4000	13.1	0.5
25 ≤ Φ < 40	0.20	0.05	4000	13.1	0.5
40 ≤ Φ < 60	0.30	0.075	4000	13.1	0.5
60 ≤ Φ < 80	0.60	0.15	3000	9.8	3.0
80 ≤ Φ < 100	1.60	0.40	2000	6.6	5.0
100 ≤ Φ ≤ 120	2.00	0.50	1500	4.9	6.0

Note③: The tolerances listed in the table are specified as all plus or all minus. When tolerances are specified as plus and minus (±), half the values given.

*Composition
Conductivity
Mechanical Properties
Fabrication Properties
Other Physical Properties

BS EN 12164-2016
For reference only
BS EN 12164-2016
For reference only
For reference only

The datasheet is for your general information only and is not subject to revision. No claim can be derived from it unless is evidence of intent or gross negligence. The data given is with reference to the relevant standards as ASTM, BS EN, JIS, RWMA, SAE and is for reference only, no warranty can be derived from the data provided. The given info may not replace the customers' own tests.